





RAK CHAIN NO.	PITCH		ROLLER DIAMETER	WIDTH BETWEEN INNER PLATES	PIN DIAMETER	PIN LENGTH	INNER PLATE DEPTH	PLATE THICKNESS	TRANSVERSE PITCH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		d1 max	b1 min	d2 max	Lc max	h2 max	T max	Pt		
	MM	INCH	MM	MM	MM	MM	MM	MM	MM	LB	KG/M
80	25.400	1	15.88	15.75	7.92	37.55	24.1	3.25		21520	2.60
100	31.750	1 1/4	19.05	18.90	9.53	44.3	30.0	4.00		33050	3.91
120	38.100	1 1/2	22.23	25.22	11.10	54.4	36.2	4.80		45130	5.62
140	44.450	1 3/4	25.40	25.22	12.70	59.0	42.2	5.60		57480	7.50
160	50.800	2	28.58	31.55	14.27	69.6	48.2	6.40		72820	10.10
180	57.150	2 1/4	35.71	35.48	17.46	78.6	54.3	7.20		95050	13.45
200	63.500	2 1/2	39.68	37.85	19.85	87.2	60.3	8.00		135000	16.15
80-2	25.400	1	15.88	15.75	7.92	66.8	24.1	3.25	29.29	43050	5.15
100-2	31.750	1 1/4	19.05	18.90	9.53	80.5	30.1	4.00	35.76	66100	7.80
120-2	38.100	1 1/2	22.23	25.22	11.10	99.7	36.2	4.80	45.44	90210	11.70
140-2	44.450	1 3/4	25.40	25.22	12.70	107.8	42.2	5.60	48.87	114950	15.14
160-2	50.800	2	28.58	31.55	14.27	127.5	48.2	6.40	58.55	145610	20.14

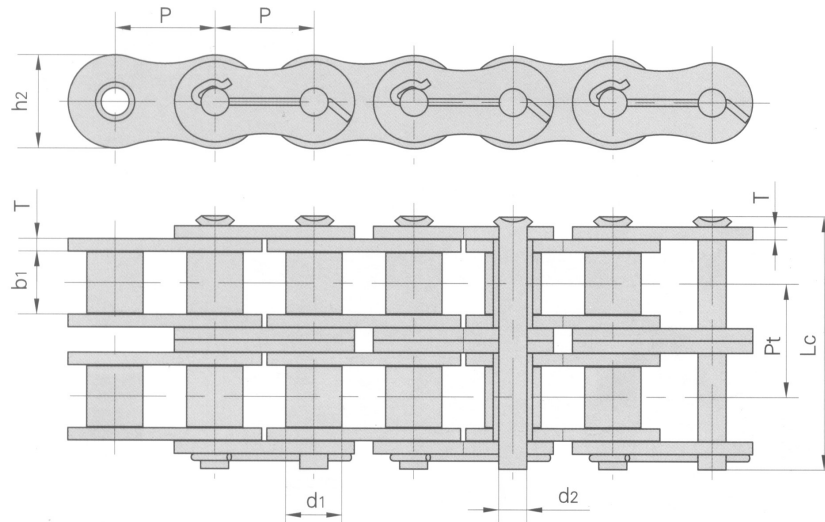


Oil Field Roller Chains

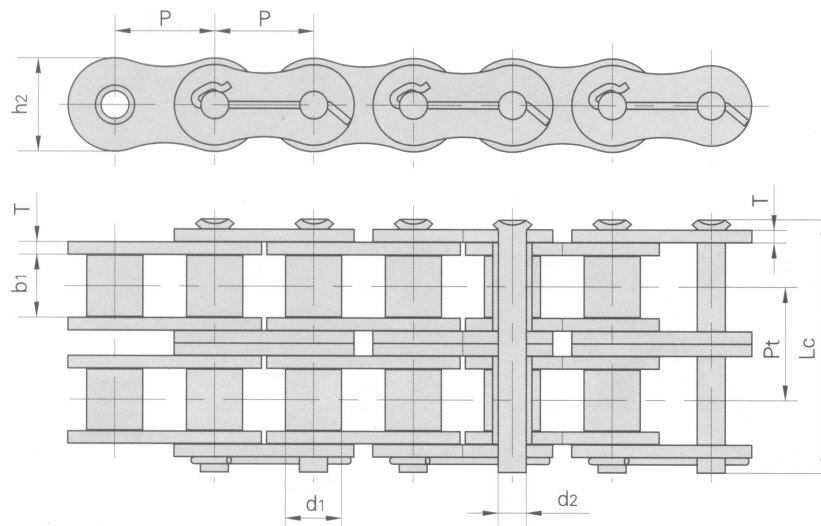

RAK CHAIN NO.	PITCH		ROLLER DIAMETER	WIDTH BETWEEN INNER PLATES	PIN DIAMETER	PIN LENGTH	INNER PLATE DEPTH	PLATE THICKNESS	TRANSVERSE PITCH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		d1 max	b1 min	d2 max	Lc max	h2 max	T max	Pt		
	MM	INCH	MM	MM	MM	MM	MM	MM	MM	LB	KG/M
180-2	57.150	2 1/4	35.71	35.48	17.46	144.4	54.3	7.20	65.84	190060	29.22
200-2	63.500	2 1/2	39.68	37.85	19.85	158.8	60.3	8.00	71.55	215000	32.24
80-3	25.400	1	15.88	15.75	7.92	96.1	24.1	3.25	29.29	64550	7.89
100-3	31.750	1 1/4	19.05	18.90	9.53	116.3	30.1	4.00	35.76	99050	11.77
120-3	38.100	1 1/2	22.23	25.22	11.10	145.2	36.2	4.80	45.44	135500	17.53
140-3	44.450	1 3/4	25.40	25.22	12.70	156.8	42.2	5.60	48.87	172380	22.20
160-3	50.800	2	28.58	31.55	14.27	186.6	48.2	6.40	58.55	218500	30.02
180-3	57.150	2 1/4	35.71	35.48	17.46	210.2	54.3	7.20	65.84	285050	38.22
200-3	63.500	2 1/2	39.68	37.85	19.85	230.4	60.3	8.00	71.55	340000	49.03
200H-3	63.500	2 1/2	39.68	37.85	19.85	249.6	60.3	9.50	78.31	340000	56.74

- We are manufacturers of engineering and special chains, for every type of industry.


- In the chain market, our products are of the highest quality, and are manufactured under the international standards ANSI B29.1 M-2002 (DIN 3183) and ISO 606.

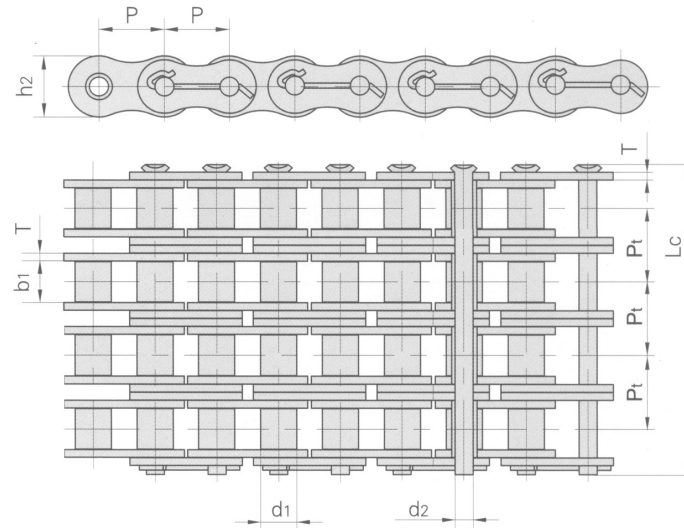

RAK CHAIN NO.	PITCH		ROLLER DIAMETER	WIDTH BETWEEN INNER PLATES	PIN DIAMETER	PIN LENGTH	INNER PLATE DEPTH	PLATE THICKNESS	TRANSVERSE PITCH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		d1 max	b1 min	d2 max	Lc max	h2 max	T max	Pt		
	MM	INCH	MM	MM	MM	MM	MM	MM	MM	LB	KG/M
80-4	25.400	1	15.88	15.75	7.92	122.9	24.1	3.25	29.29	86050	10.24
100-4	31.750	1 1/4	19.05	18.90	9.53	151.5	30.0	4.00	35.76	132000	15.39
120-4	38.100	1 1/2	22.23	25.22	11.10	190.6	36.2	4.80	45.44	180410	22.19
140-4	44.450	1 3/4	25.40	25.22	12.70	205.7	42.2	5.60	48.87	229810	29.63
160-4	50.800	2	28.58	31.55	14.27	245.2	48.2	6.40	58.55	291230	39.94
200-4	63.500	2 1/2	39.68	37.85	19.85	302.0	60.3	8.00	71.55	435050	63.60
80-5	25.400	1	15.88	15.75	7.92	152.2	24.1	3.25	29.29	107510	12.79
100-5	31.750	1 1/4	19.05	18.90	9.53	187.8	30.1	4.00	35.76	165000	19.22
120-5	38.100	1 1/2	22.23	25.22	11.10	236.1	36.2	4.80	45.44	225520	27.71
140-5	44.450	1 3/4	25.40	25.22	12.70	254.6	42.2	5.60	48.87	287280	39.20
160-5	50.800	2	28.58	31.75	14.27	303.3	48.2	6.40	58.55	364000	52.40
80-6	25.400	1	15.88	15.75	7.92	181.5	24.1	3.25	29.29	129000	15.34



Oil Field Roller Chains

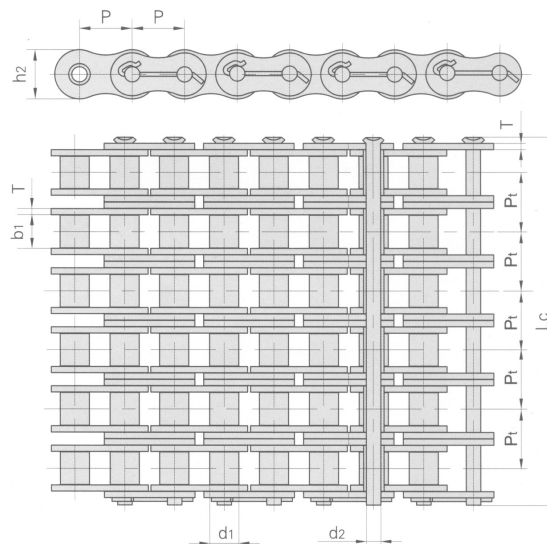

RAK CHAIN NO.	PITCH		ROLLER DIAMETER	WIDTH BETWEEN INNER PLATES	PIN DIAMETER	PIN LENGTH	INNER PLATE DEPTH	PLATE THICKNESS	TRANSVERSE PITCH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		d1 max	b1 min	d2 max	Lc max	h2 max	T max	Pt		
	MM	INCH	MM	MM	MM	MM	MM	MM	MM	LB	KG/M
100-6	31.750	1 1/4	19.05	18.90	9.53	223.6	30.1	4.00	35.76	198100	23.05
120-6	38.100	1 1/2	22.23	25.22	11.10	281.6	36.2	4.80	45.44	270630	33.24
140-6	44.450	1 3/4	25.40	25.22	12.70	303.4	42.2	5.60	48.87	344800	44.38
160-6	50.800	2	28.58	31.55	14.27	362.3	48.2	6.40	58.55	436850	59.83
200-6	63.500	1 3/4	39.68	37.85	19.85	445.0	60.3	8.00	71.55	621900	95.23
80-8	25.400	1	15.88	15.75	7.92	240.1	24.1	3.25	29.29	172050	20.44
100-8	31.750	1 1/4	19.05	18.90	9.53	295.1	30.1	4.00	35.76	264000	30.71
120-8	38.100	1 1/2	22.23	25.22	11.10	372.4	36.2	4.80	45.44	360810	44.28
140-8	44.450	1 3/4	25.40	25.22	12.70	401.1	42.2	5.60	48.87	459630	62.21

- We are manufacturers of engineering and special chains, for every type of industry.

- In the chain market, our products are of the highest quality, and are manufactured under the international standards ANSI B29.1 M-2002 (DIN 3183) and ISO 606.