


LEAF CHAINS




BL Series

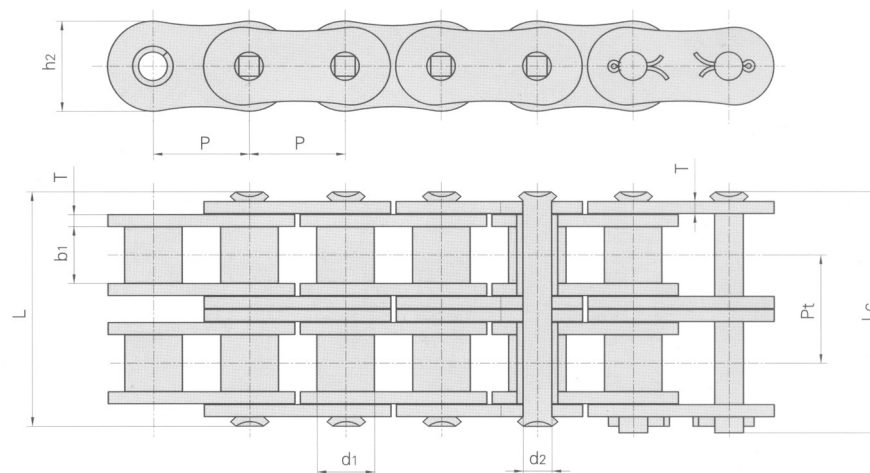

RAK CHAIN NO.	PITCH	PLATE LACING	PLATE DEPTH	PLATE THICKNESS	PIN DIAMETER	PIN LENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		h2 max	T max	d2 max	L max		
	MM		MM	MM	MM	MM	LB	KG/M
BL422	12.7	2X2	12.07	2.08	5.09	11.05	5045	0.64
BL423		2X3				13.16	5045	0.80
BL434		3X4				17.40	7591	1.12
BL444		4X4				19.51	10114	1.28
BL446		4X6				23.75	10114	1.60
BL466		6X6				27.99	15159	1.92
BL488		8X8				36.45	20227	2.56
BL522	15.875	2X2	15.09	2.44	5.96	12.90	7591	0.88
BL523		2X3				15.37	7591	1.10
BL534		3X4				20.32	11114	1.50
BL544		4X4				22.78	15159	1.80
BL546		4X6				27.74	15159	2.20
BL566		6X6				32.69	22750	2.65
BL588		8X8				42.57	30318	3.50

- We are manufacturers of engineering and special chains, for every type of industry.

- In the chain market, our products are of the highest quality, and are manufactured under the international standards ANSI B29.1 M-2002 (DIN 3183) and ISO 606.

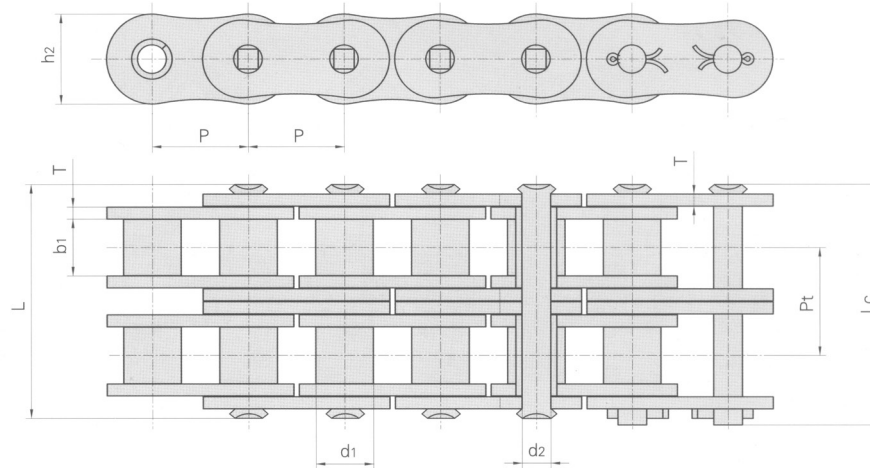

RAK CHAIN NO.	PITCH	PLATE LACING	PLATE DEPTH	PLATE THICKNESS	PIN DIAMETER	PIN LENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		h2 max	T max	d2 max	L max		
	MM		MM	MM	MM	MM	LB	KG/M
BL622	19.05	2X2	18.11	3.30	7.94	17.37	11114	1.45
BL623		2X3				20.73	11114	1.80
BL634		3X4				27.43	17181	2.50
BL644		4x4				30.78	22250	2.90
BL646		4X6				37.49	22250	3.60
BL666		6X6				44.20	33364	4.30
BL688		8X8				57.61	44477	5.80
BL822	25.4	2X2	24.13	4.09	9.54	21.34	19204	2.20
BL823		2X3				25.48	19204	2.70
BL834		3X4				33.76	29318	3.80
BL844		4X4				37.90	38409	4.30
BL846		4X6				46.18	38409	5.40
BL866		6X6				54.46	57636	6.50
BL888		8X8				71.02	76841	8.60

BL Series


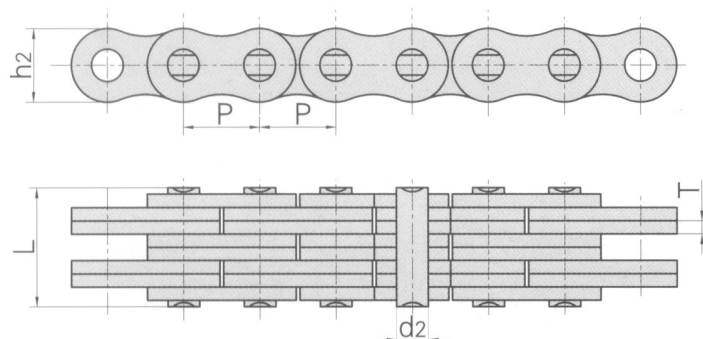


Plate lacing

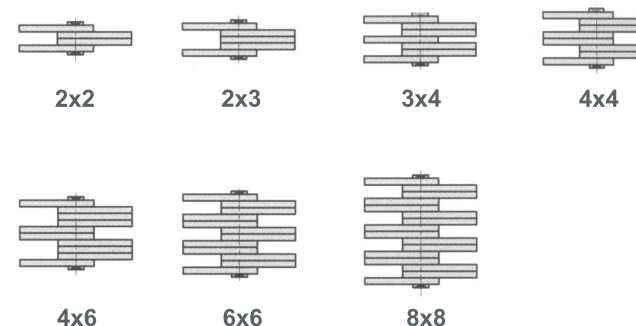

RAK CHAIN NO.	PITCH	PLATE LACING	PLATE DEPTH	PLATE THICKNESS	PIN DIAMETER	PIN LENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		h2 max	T max	d2 max	L max		
	MM		MM	MM	MM	MM	LB	KG/M
BL1022	31.75	2X2	30.18	4.9	11.11	25.37	26272	3.40
BL1023		2X3				30.33	26727	4.30
BL1034		3X4				40.23	41454	6.00
BL1044		4X4				45.19	52568	6.90
BL1046		4X6				55.09	52568	8.60
BL1066		6X6				65.00	78863	10.30
BL1088		8X8				84.81	105136	13.80
BL1222	38.1	2X2	36.20	5.77	12.71	29.62	34363	4.6
BL1223		2X3				35.43	34363	5.8
BL1234		3X4				47.07	55591	8.1
BL1244		4X4				52.88	68750	9.3
BL1246		4X6				64.52	68750	11.6
BL1266		6X6				76.15	103113	13.9
BL1288		8X8				99.42	137500	18.6

- We are manufacturers of engineering and special chains, for every type of industry.

- In the chain market, our products are of the highest quality, and are manufactured under the international standards ANSI B29.1 M-2002 (DIN 3183) and ISO 606.

RAK CHAIN NO.	PITCH	PLATE LACING	PLATE DEPTH	PLATE THICKNESS	PIN DIAMETER	PIN LENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		h2 max	T max	d2 max	L max		
	MM		MM	MM	MM	MM	LB	KG/M
BL1422	44.45	2X2	42.24	6.55	14.29	33.55	43477	6.1
BL1423		2X3				40.16	43477	7.6
BL1434		3X4				53.37	71772	10.6
BL1444		4x4				59.97	86954	12.2
BL1446		4X6				73.18	86954	15.2
BL1466		6X6				86.39	131431	18.2
BL1488		8X8				112.8	173886	24.3
BL1622	50.8	2X2	48.26	7.52	17.46	39.01	65704	8.0
BL1623		2X3				46.58	65704	10.0
BL1634		3X4				61.72	100091	14.0
BL1644		4X4				69.29	131431	16.0
BL1646		4X6				84.43	131431	20.0
BL1666		6X6				99.57	194863	24.0
BL1688		8X8				129.84	262841	32.0
BL2022	63.5	2X2	60.33	9.91	23.81	51.74	98568	15.8
BL2023		2x3				61.70	98568	19.8
BL2034		3X4				81.60	147590	27.7
BL2044		4X4				91.57	197163	31.6
BL2046		4X6				111.48	197163	47.4
BL2066		6X6				131.39	295704	47.4
BL2088		8X8				171.22	394272	63.2



AL Series


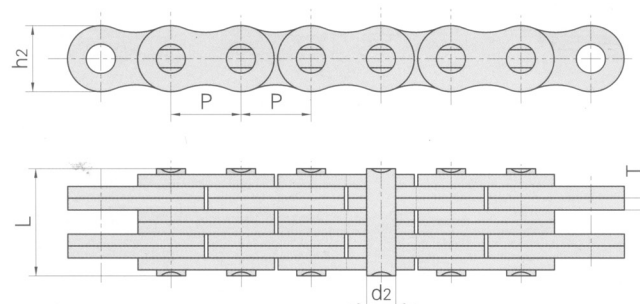


Plate lacing

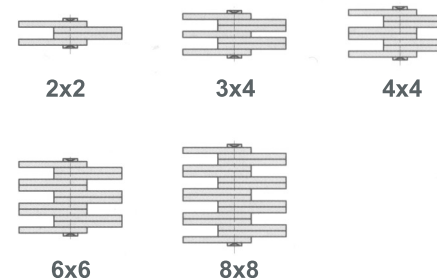

- We are manufacturers of engineering and special chains, for every type of industry.

- In the chain market, our products are of the highest quality, and are manufactured under the international standards ANSI B29.1 M-2002 (DIN 3183) and ISO 606.

RAK CHAIN NO.	PITCH	PLATE LACING	PLATE DEPTH	PLATE THICKNESS	PIN DIAMETER	PIN LENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		h2 max	T max	d2 max	L max		
	MM		MM	MM	MM	MM	LB	KG/M
AL322	9.525	2X2	7.7	1.3	3.58	6.8	2045	0.23
AL344		4X4				11.6	4090	0.46
AL422	12.7	2X2	10.4	1.5	3.96	8.3	3205	0.39
AL444		4X4				14.4	6409	0.74
AL466		6X6				20.5	9614	1.13
AL522	15.9	2X2	12.80	2.03	5.08	11.05	5000	0.64
AL534		3X4				17.0	7500	1.10
AL544		4X4				19.4	10000	1.25
AL566		6X6				27.5	15000	1.79
AL622	19.05	2X2	15.6	2.42	5.94	13.0	8409	0.86
AL644		4X4				22.7	14450	1.76
AL666		6X6				32.2	22750	2.60
AL688		8X8				42.2	30317	3.49
AL822	25.40	2X2	20.5	3.25	7.92	16.0	12886	1.54
AL844		4X4				29.4	25773	3.00
AL866		6X6				44.2	38636	4.46


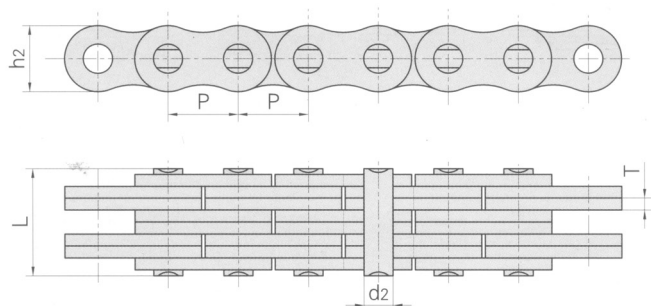


Plate lacing

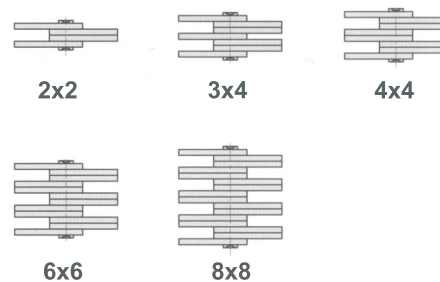

RAK CHAIN NO.	PITCH	PLATE LACING	PLATE DEPTH	PLATE THICKNESS	PIN DIAMETER	PIN LENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P		h2 max	T max	d2 max	L max		
	MM		MM	MM	MM	MM	LB	KG/M
AL1022	31.75	2X2	25.6	4.0	9.53	19.6	20114	2.37
AL1044		4x4				36.4	40227	4.68
AL1066		6X6				52.3	60227	7.20
AL1088		8X8				68.5	80454	9.94
AL1222	38.1	2X2	30.5	4.8	11.10	24.3	28864	3.65
AL1244		4X4				43.8	57727	7.05
AL1266		6X6				63.2	86591	10.50
AL1288		8X8				82.6	11545	14.03
AL1444	44.45	4X4	36.4	5.6	12.64	51.3	84705	10.34
AL1466		6X6				74.56	127045	15.16
AL1644	50.8	4X4	41.6	6.4	14.21	83.8	160454	19.76
AL1666		6X6				83.8	160454	19.76
AL1688		8X8				109.5	214090	25.47